


RS Carpet Kit


with

Rear Seat Delete

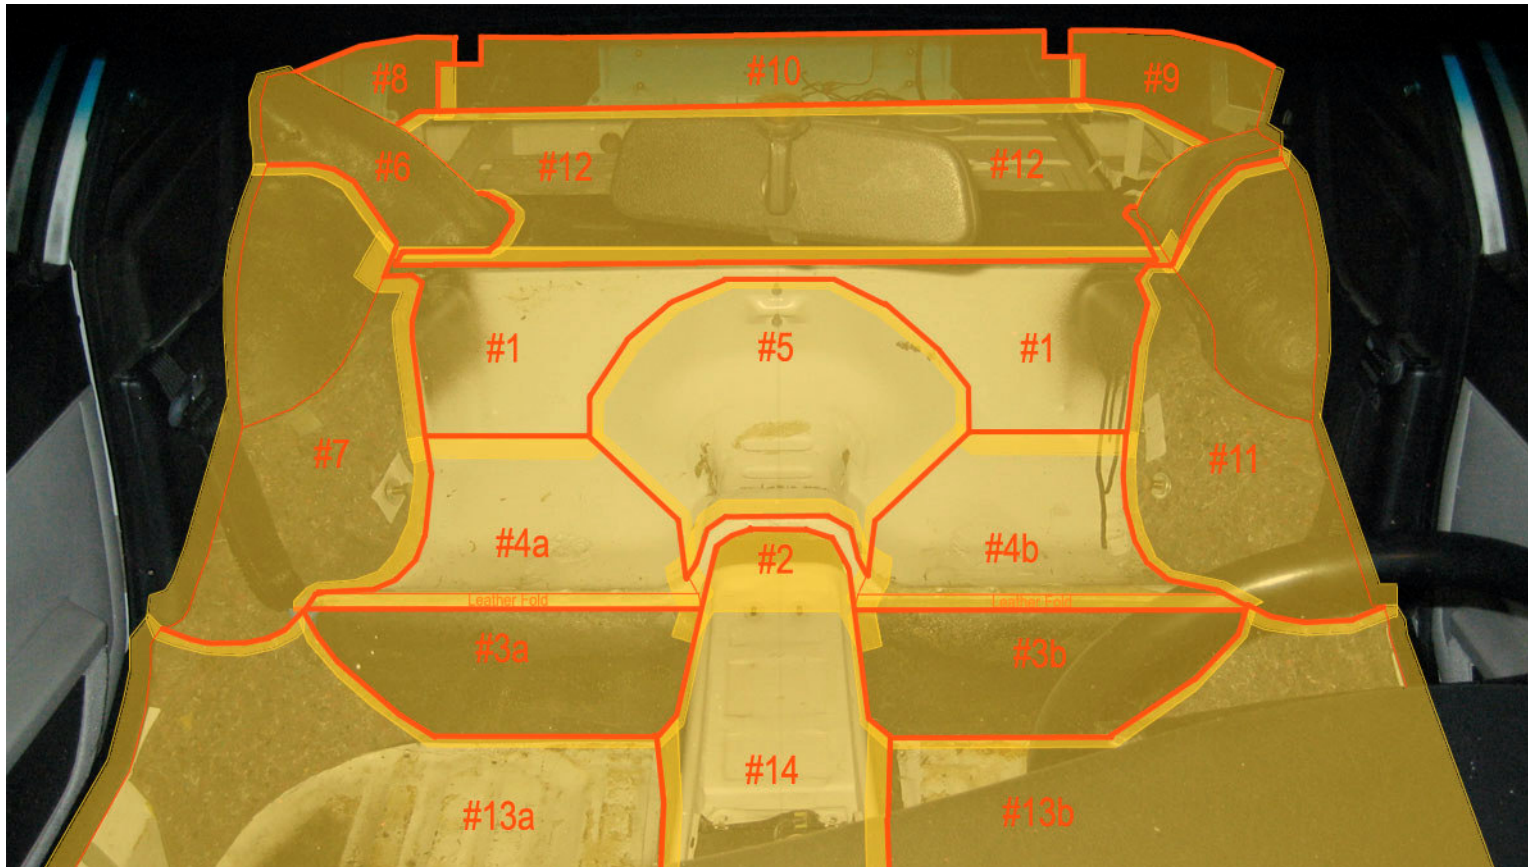

Final Layout


- The follow slides will show how I customized and installed a rear seat delete carpet kit.
- The thin red lines indicate a carpet piece edge or a fold/contour in the carpet.
- The darker/wider red lines indicate a finish seam sewn into the carpet piece.
- The darker yellow bands are where two layers of carpet are overlapping for a clean installation.
- The carpet pieces are numbered in the order they get installed.

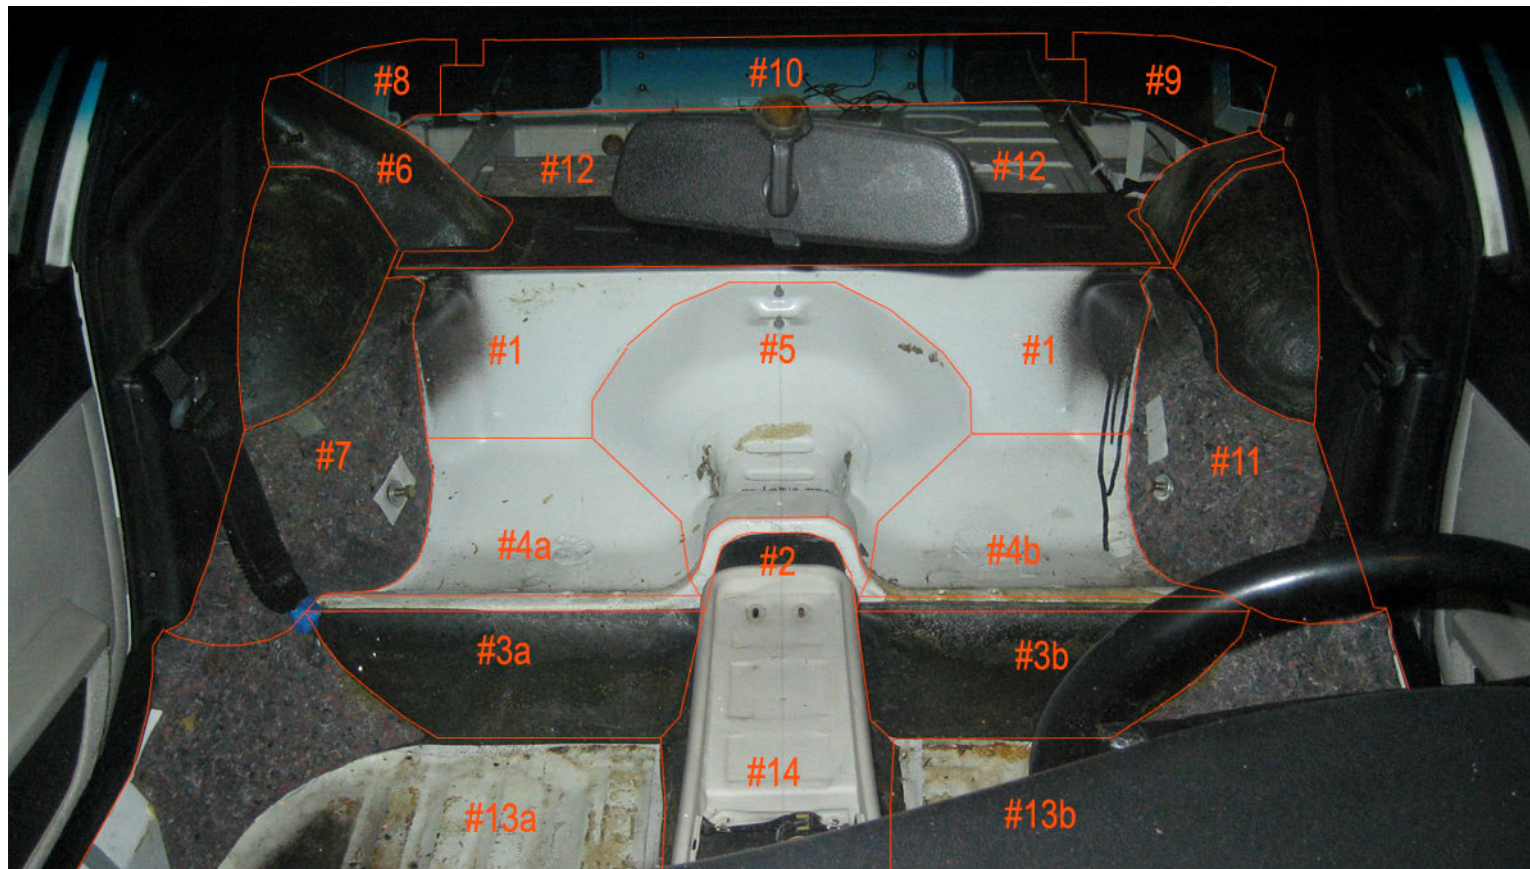

Layout - (Rear Seat Delete Kit)

Carpet Piece #1 - Rear Seat Back

Slide 4

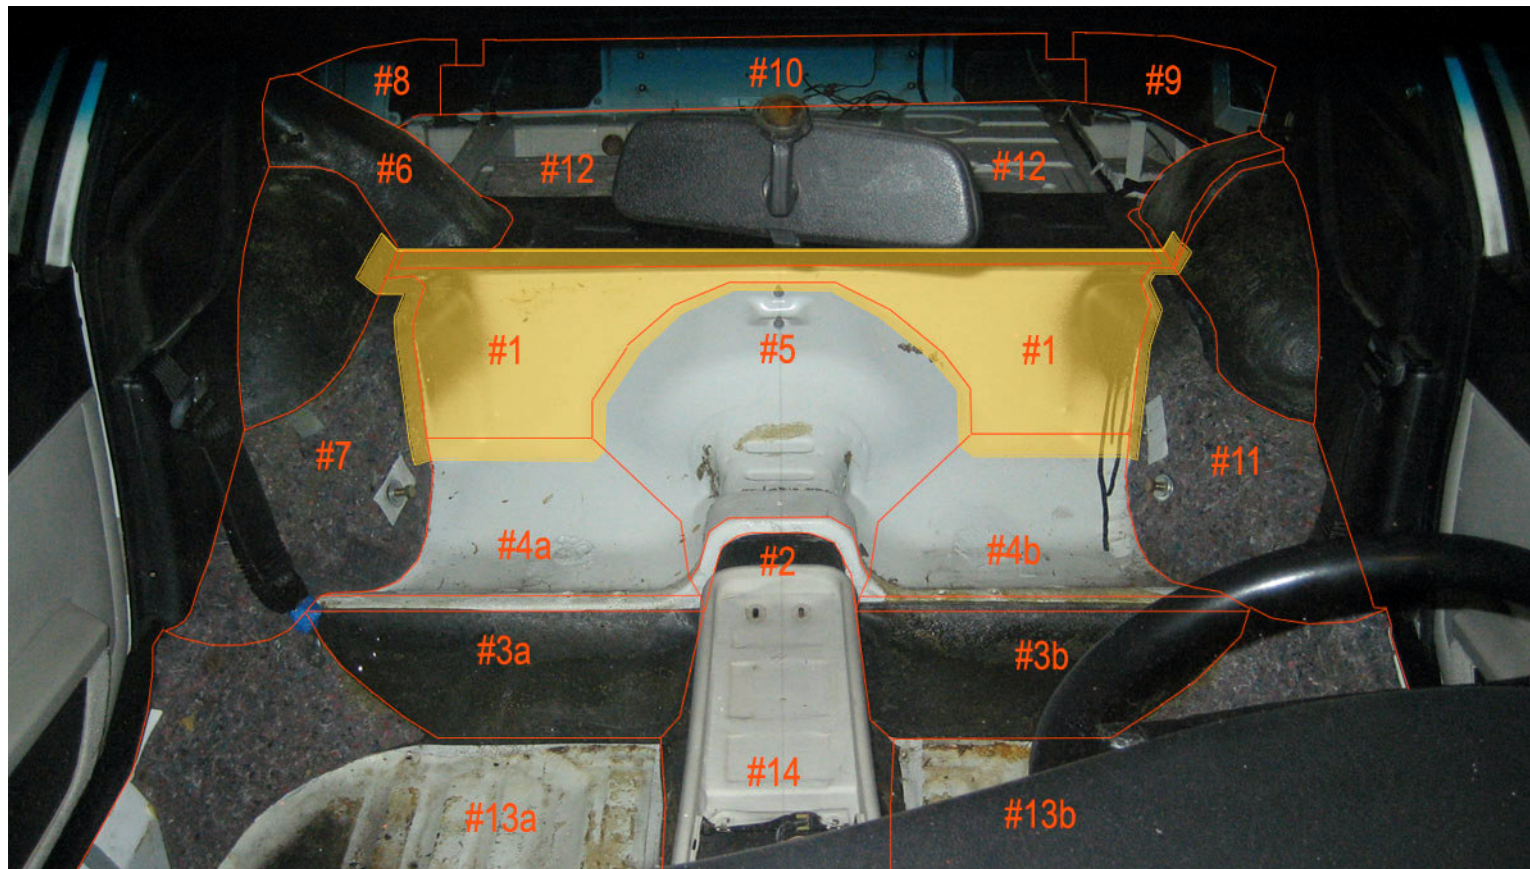


Piece #1 - (Rear Seat Delete Kit)

- 1-piece seat back, no finish seams required
- Extend carpet over rear deck 4-6"

Carpet Piece #2 - Underlay at center tunnel

Slide 5

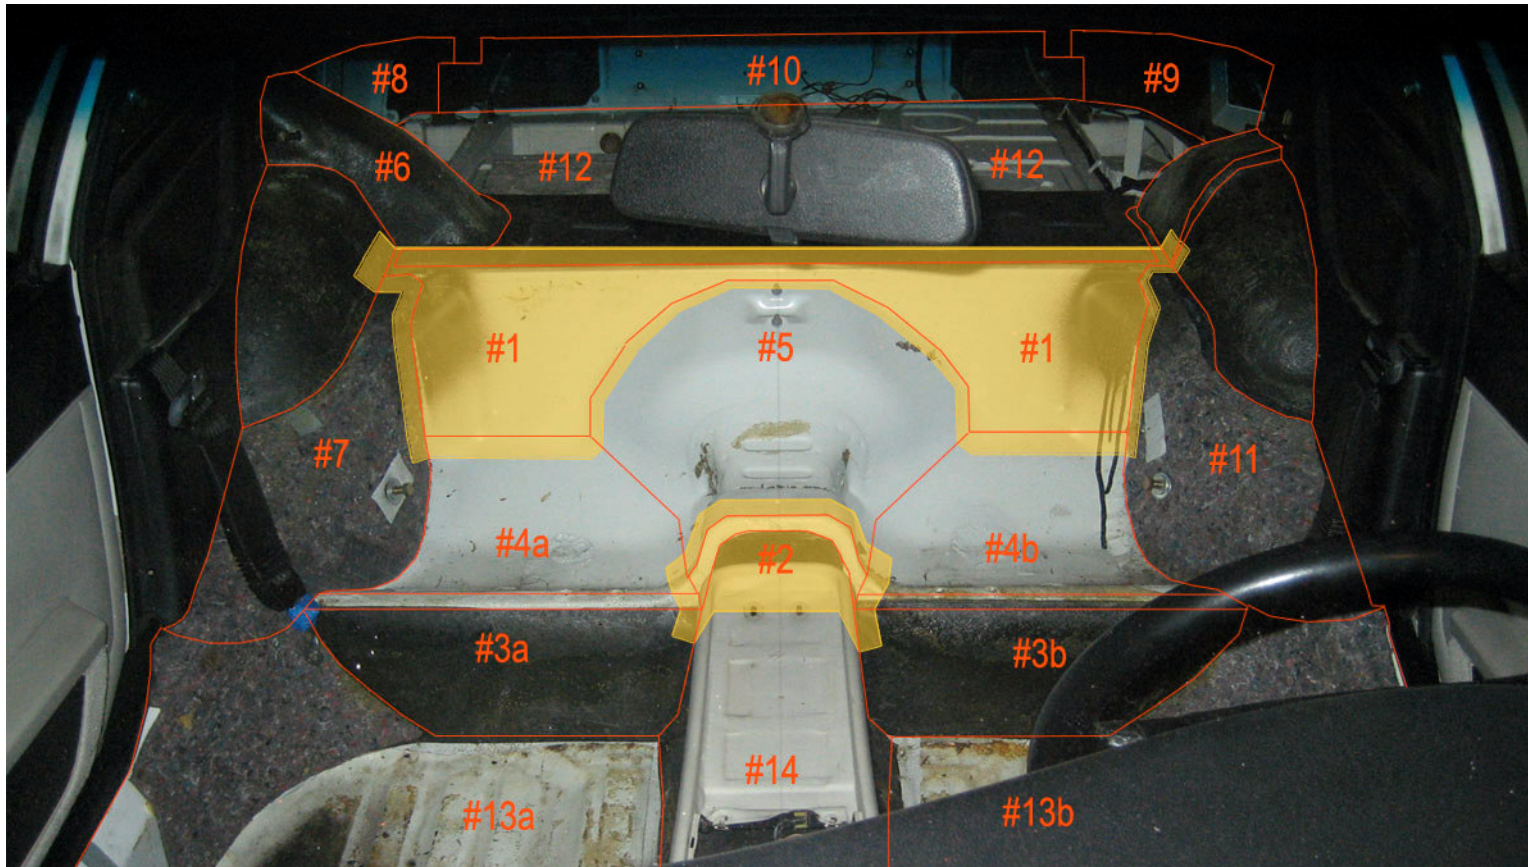


Piece #2 - (Rear Seat Delete Kit)

- **1-piece, underlay at center tunnel.**
- **No finish seams required.**


Carpet Piece #3a & 3b - Front Face of Rear Seat Bottom

Slide 6

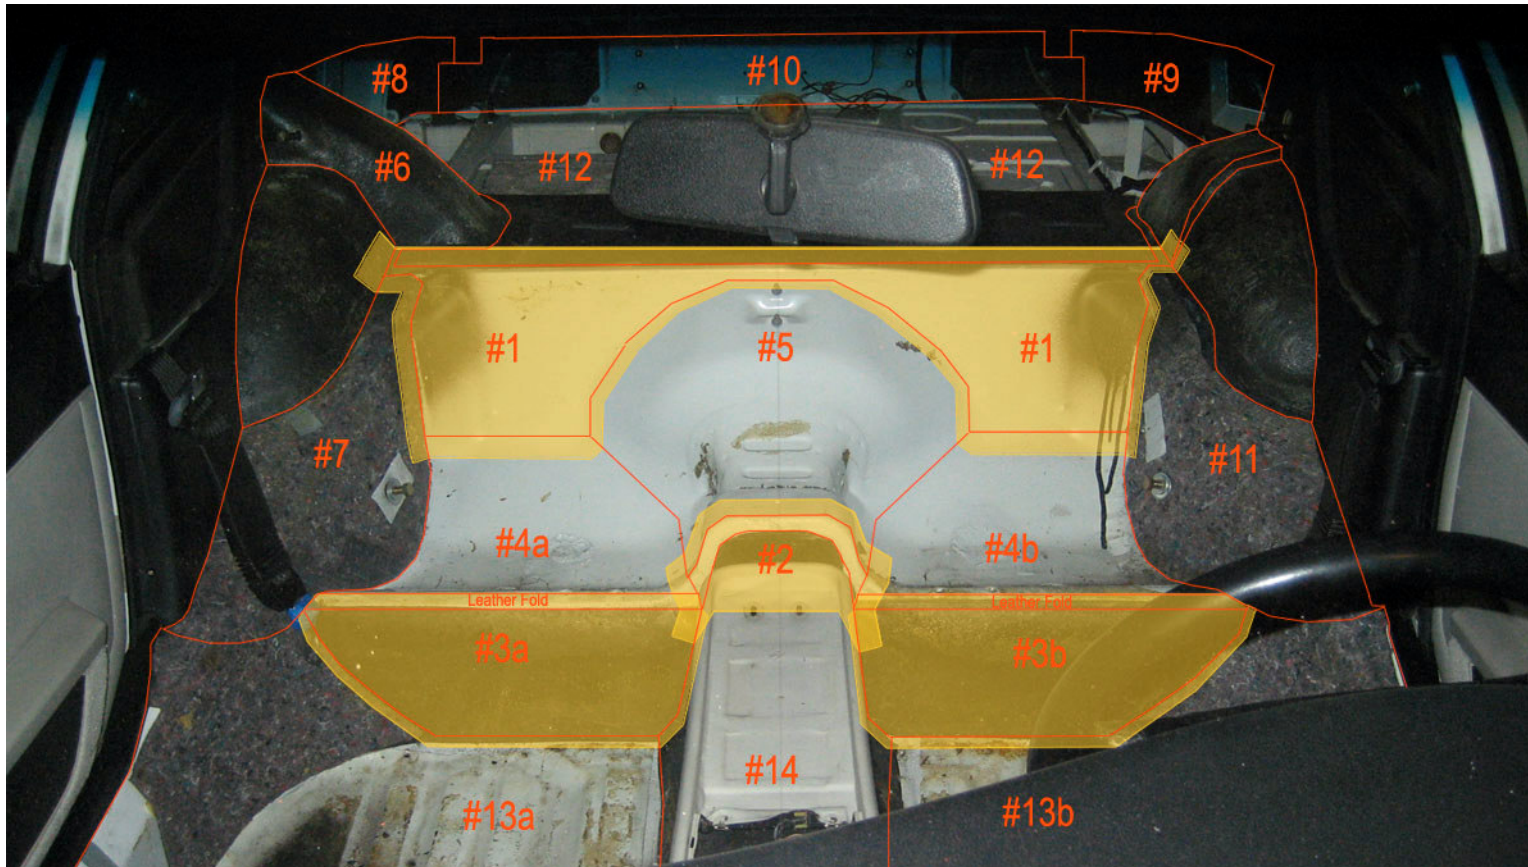


Piece #3a & 3b - (Standard 944 Kit)

- 2-pieces, front face of rear seat bottom.
- Provide a 3" leather flab that will tuck underneath the rear seats (if keeping rear seat) or be covered by pieces #4a & 4b included with the rear seat delete kit.

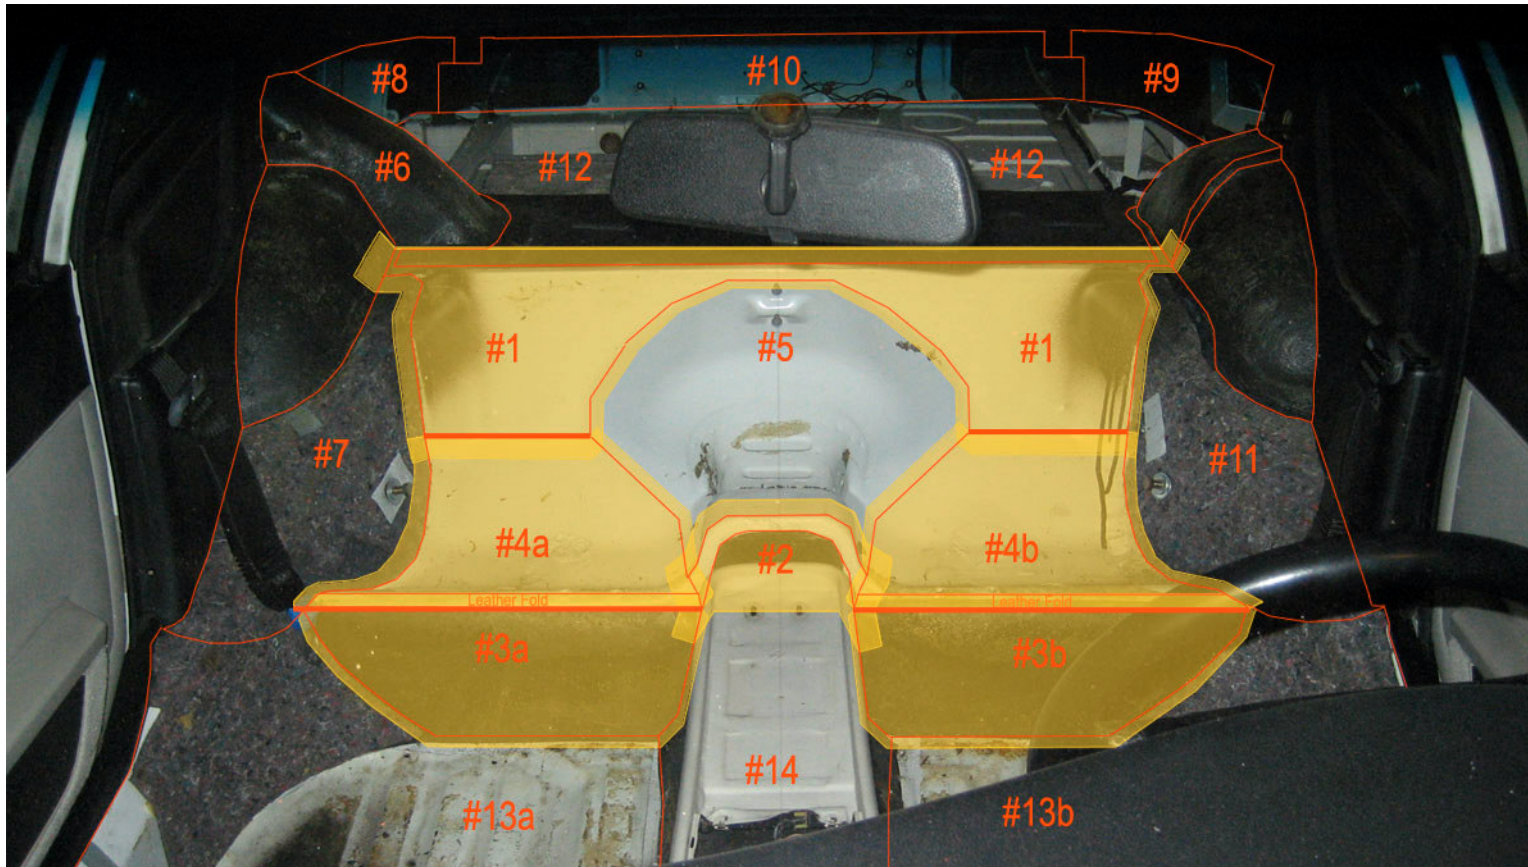


Piece #4a & 4b - (Rear Seat Delete Kit)

- 2-pieces, one each to cover the rear seat bottom.
- Provide a finish seam at the back edge to lay over piece #1.
- Provide a finish seam at the front edge to lay over the leather folds of pieces #3a & 3b.
- Extend width on the inside edge to extend up the center tunnel about 2" so that piece #5 overlaps.
- Extend width on the outside edge to extend up the wheel wells about 2" so that pieces #7 and #11 overlaps.

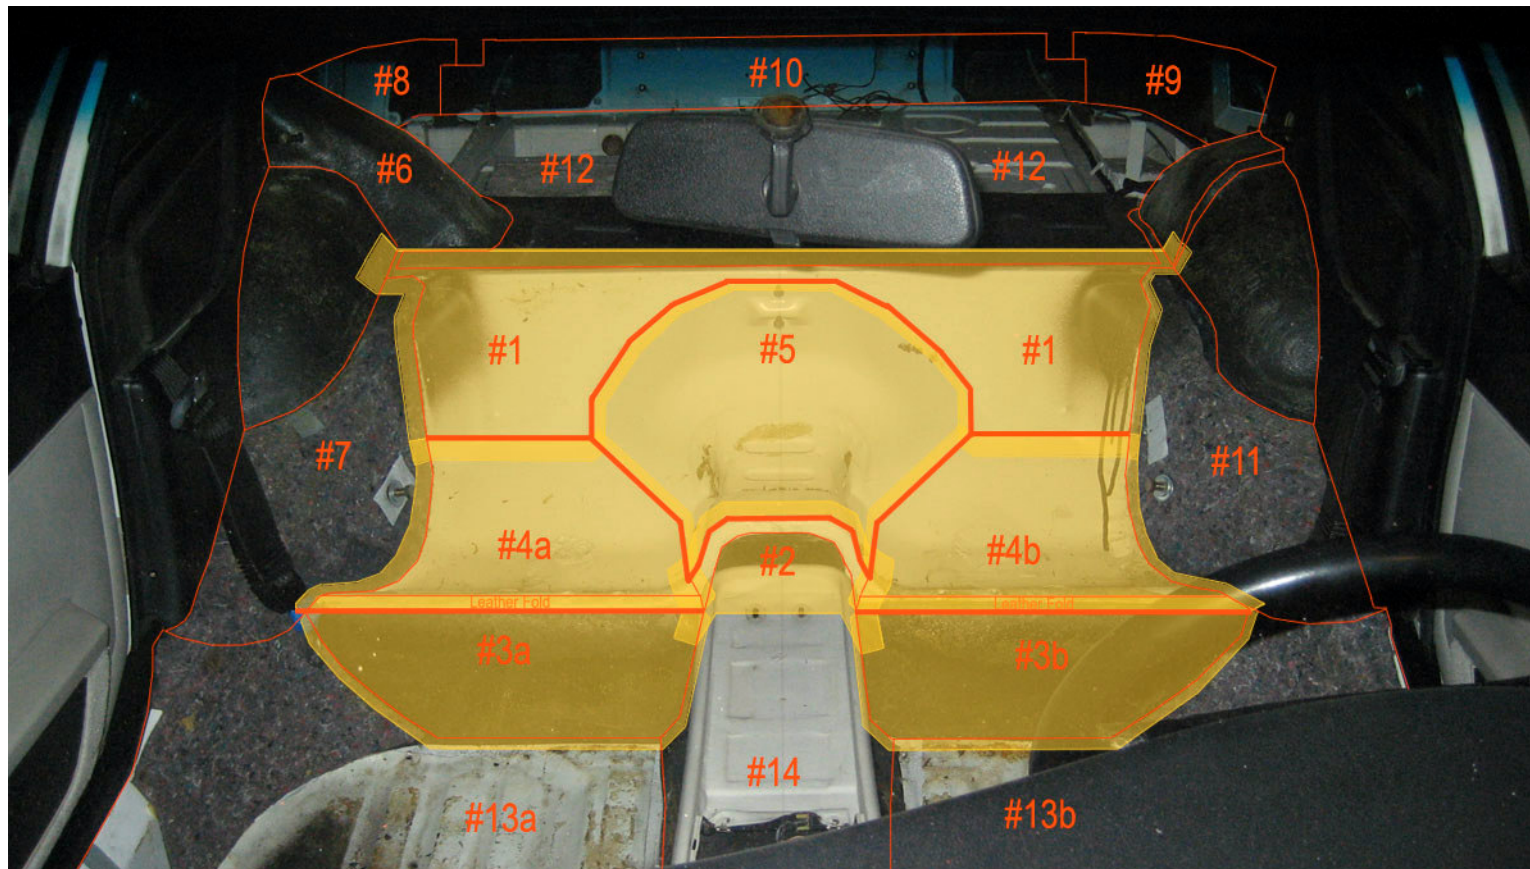


Piece #5 - (Rear Seat Delete Kit)

- 1-piece, cover at center tunnel.
- Provide finish seams at all edges.

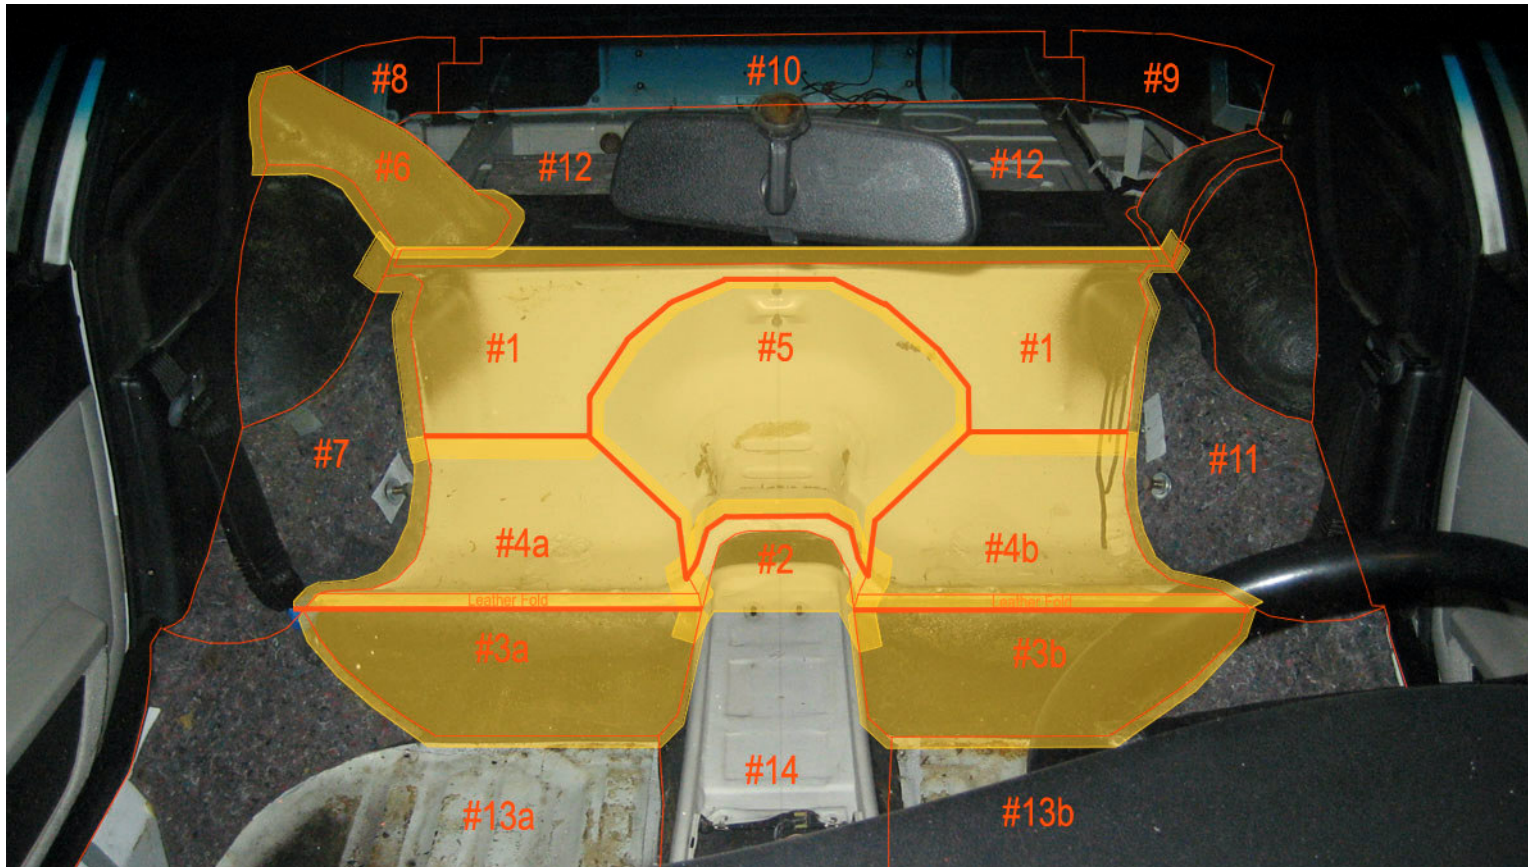


Piece #6 - (Standard 944 Kit)

- **1-piece, to fit over the fuel fill cowl.**
- **Provide enough material at the front edge to extend about 2" underneath piece #7.**
- **Provide enough material at the rear edge to extend about 2" underneath piece #8.**
- **Provide enough material at the bottom edge to extend about 2" underneath piece #12.**
- **Provide enough material at the top edge to extend about 2" underneath the plastic molding.**

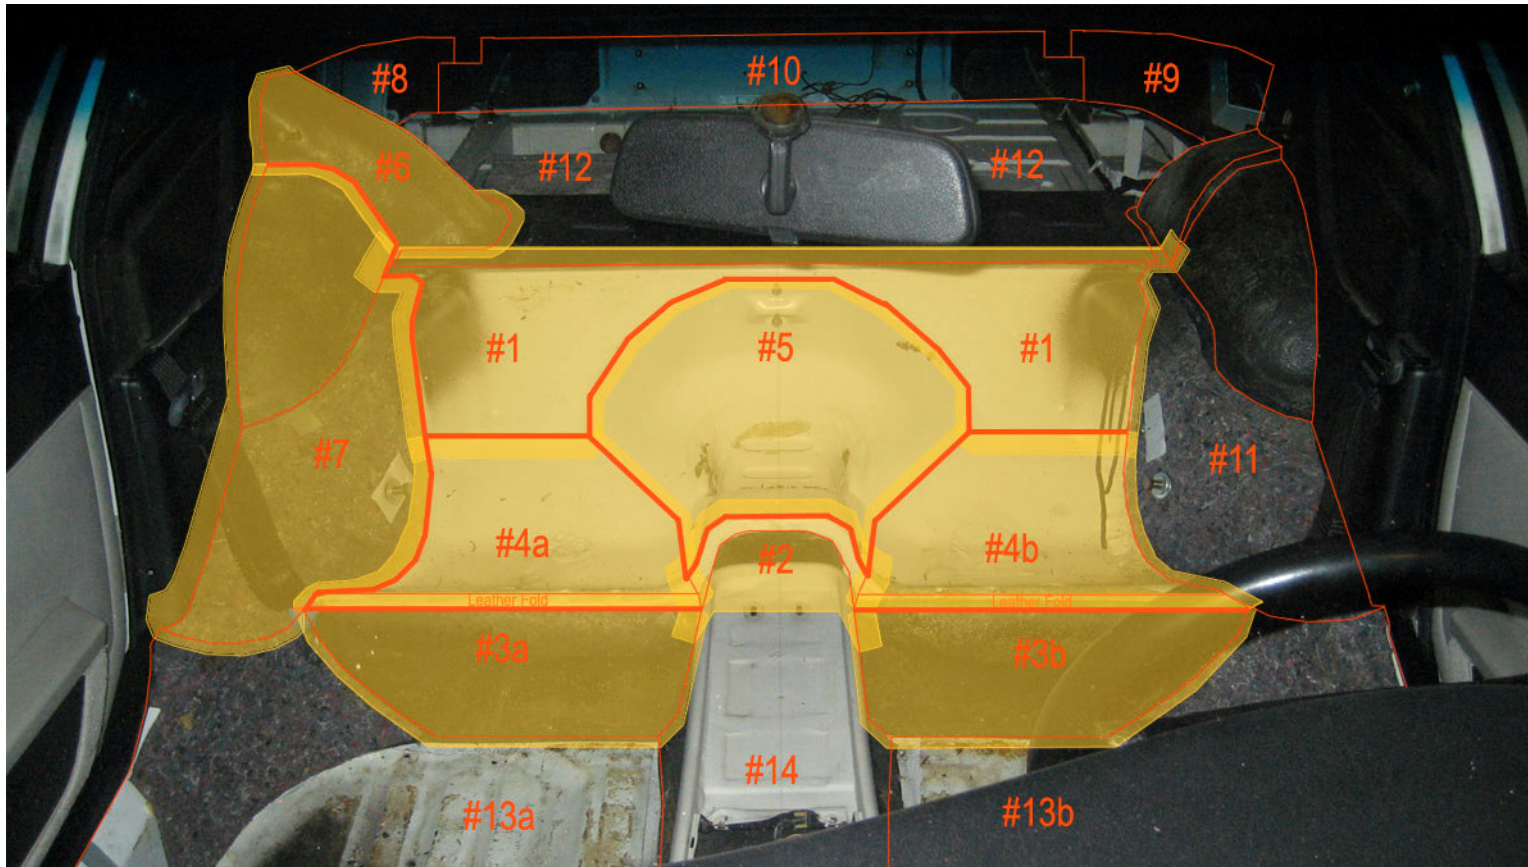


Piece #7 - (Standard 944 Kit)

- 1-piece, passenger side rear panel.
- Provide a finish seam leading from the front lower seat half continuous up and around to the plastic molding at the top of the fuel fill cowl.
- Provide enough material at the top edge to extend about 2" underneath the plastic molding and piece #13a.

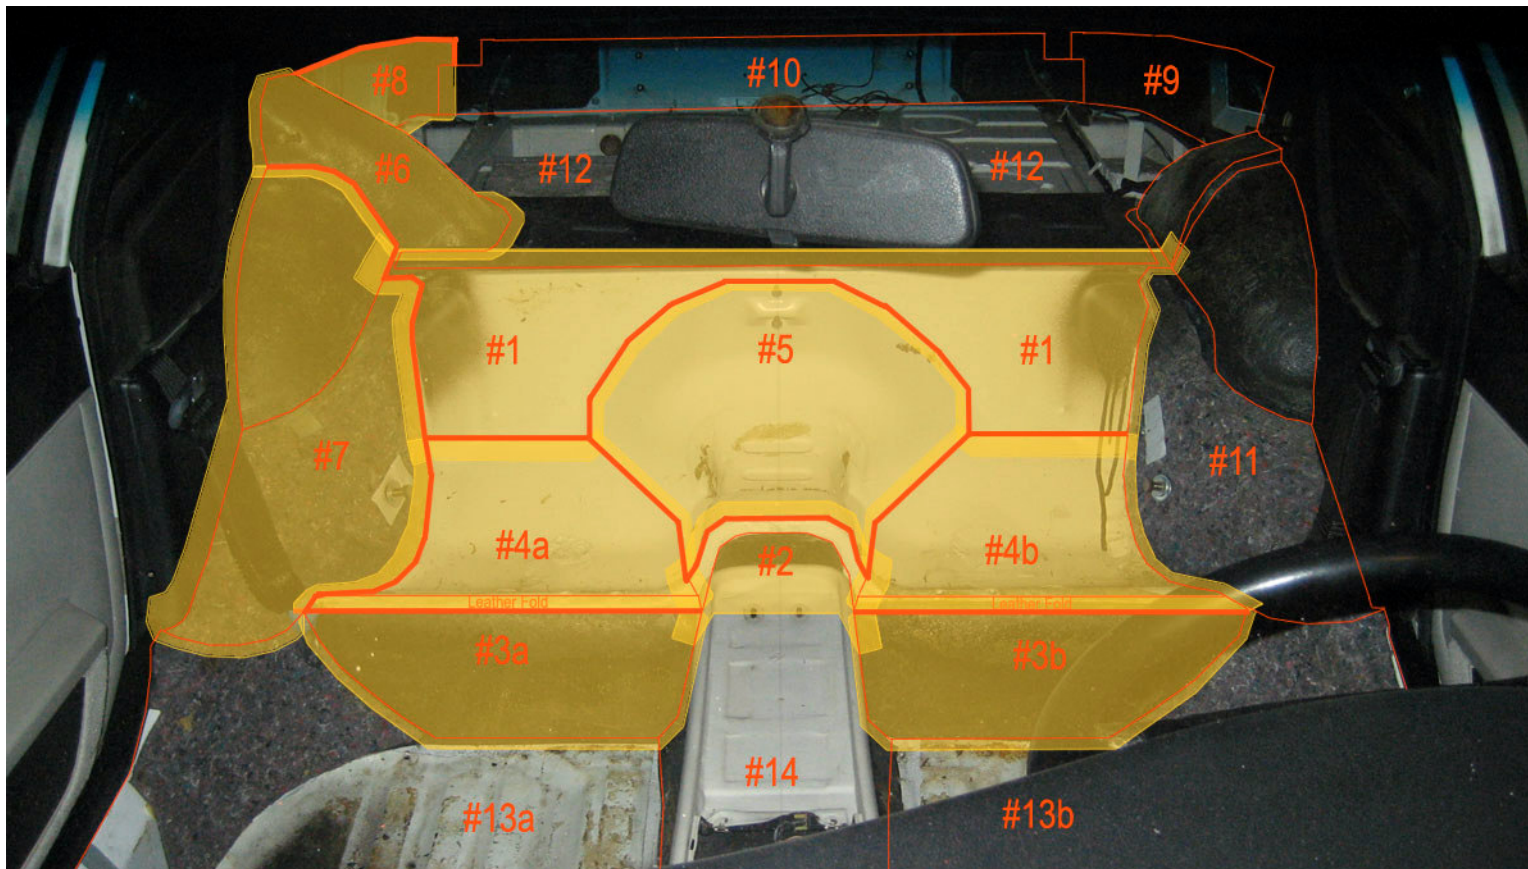


Piece #8 - (Standard 944 Kit)

- 1-piece, passenger side panel at rear hatch.
- Provide a finish seam that begins at the lower back edge that extents forward continuously along the top of the panel and down along the fuel fill cowl.
- Provide enough material at the lower edge to extend about 2” underneath piece #12.
- Use mechanical fasteners to secure piece along top edge similar to OEM carpet pieces.

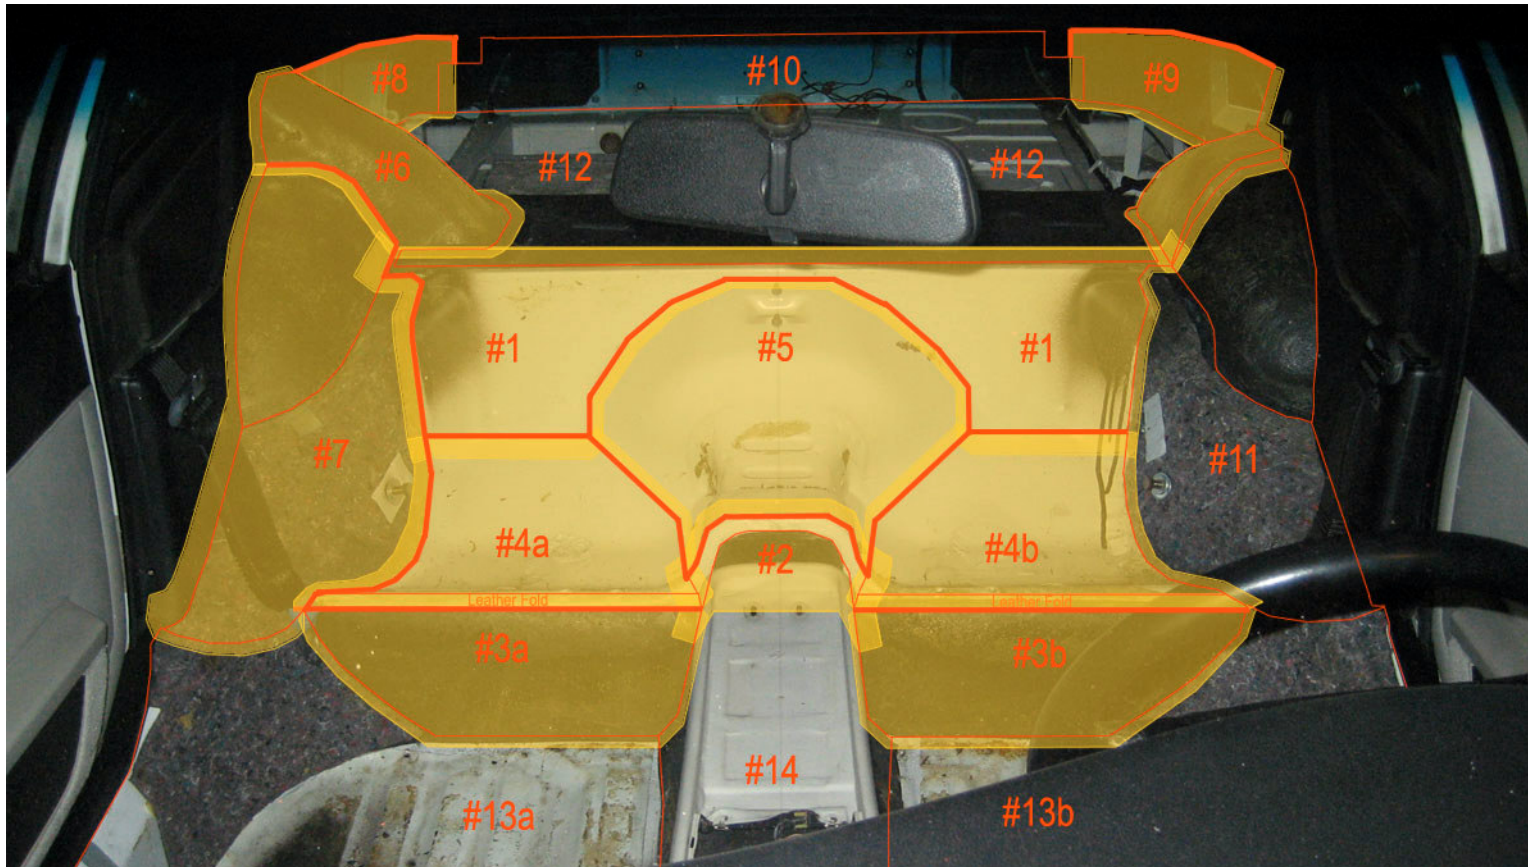


Piece #9 - (Standard 944 Kit)

- 1-piece, drivers side rear hatch panel.
- Provide a finish seam that begins at the lower back edge that extents forward continuously along the top of the panel.
- Provide enough material at the lower edge to extend about 2" underneath piece #12.
- Provide enough material at the front edge to extend about 2" underneath piece #11.
- Use mechanical fasteners to secure piece along top edge similar to OEM carpet pieces.

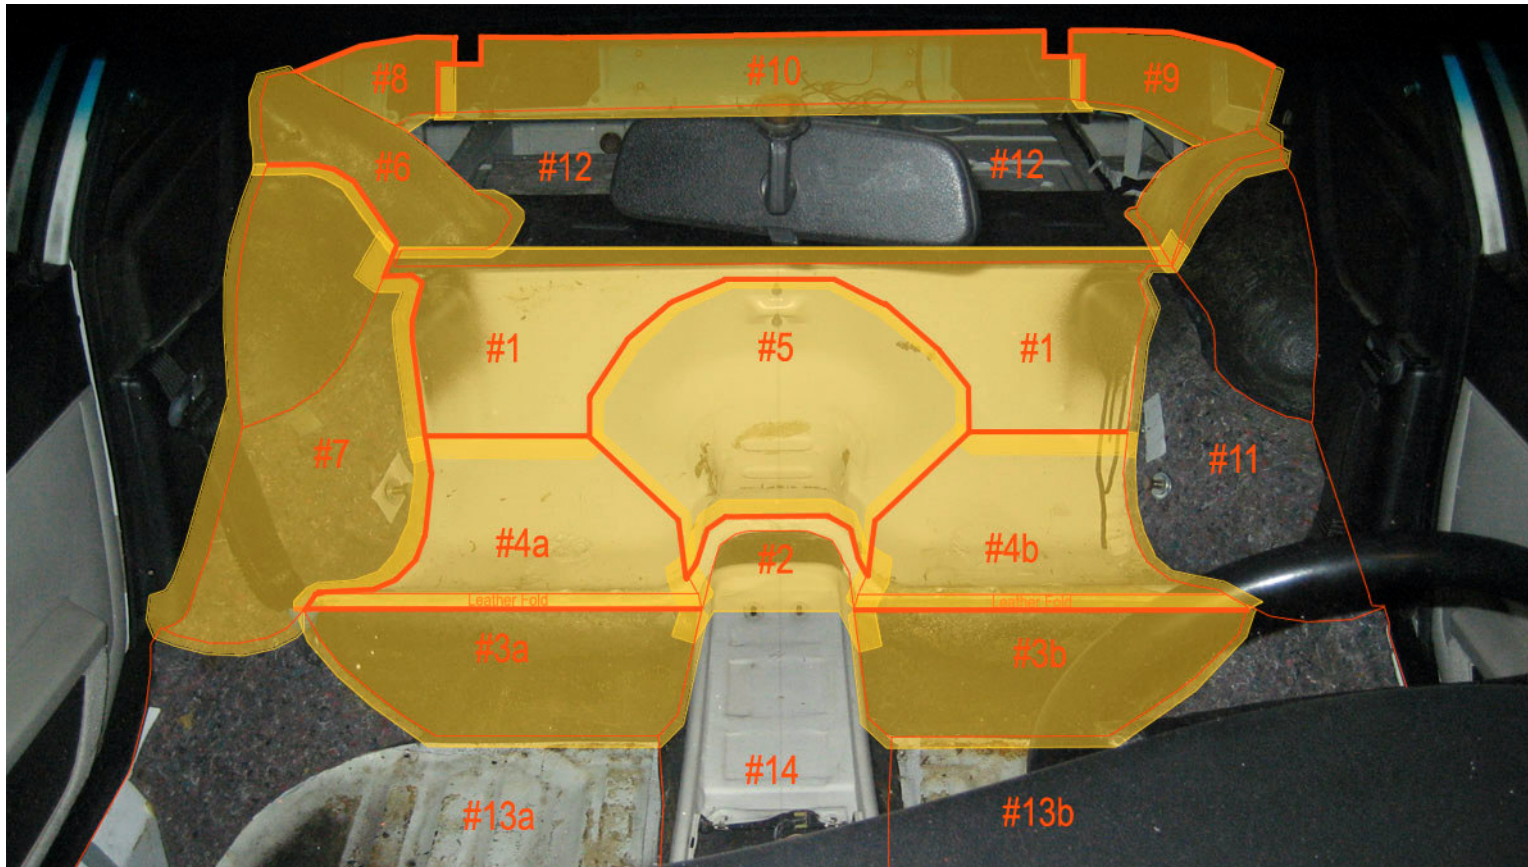


Piece #10 - (Standard 944 Kit)

- **1-piece, back panel at rear hatch.**
- **Provide a continuous finish seam along the top front edge extending down at both the passenger and drivers side.**
- **Provide enough material at the bottom edge to extend an additional 2" underneath piece #12.**
- **Use mechanical fasteners to secure piece along top edge similar to pieces #8 & 9.**

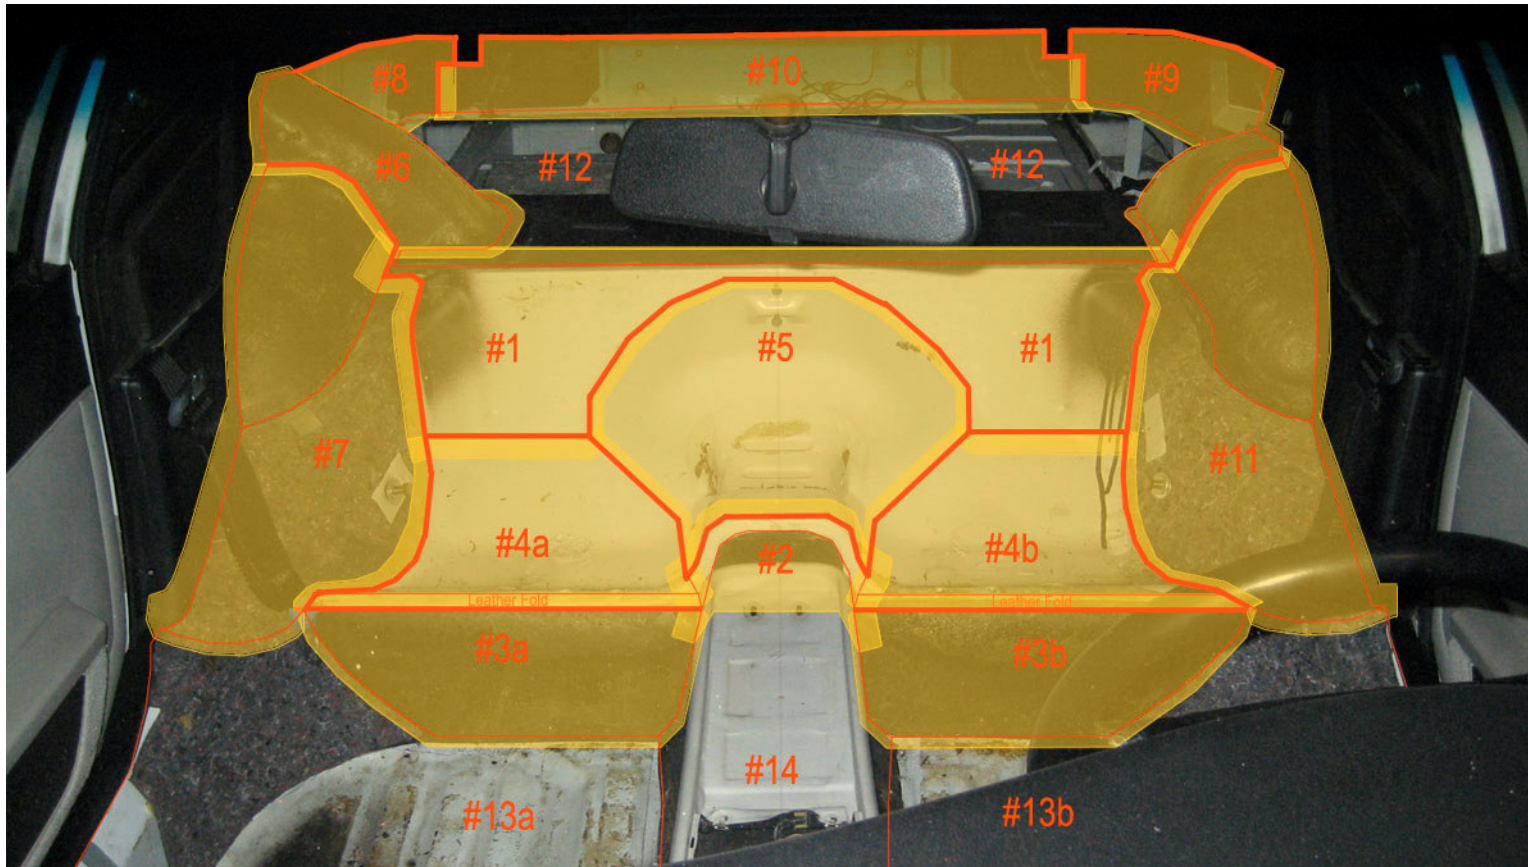


Piece #11 - (Standard 944 Kit)

- **1-piece, drivers side rear panel.**
- **Provide a finish seam leading from the front lower seat half continuous up and around to the plastic molding at the rear quarter window.**
- **Provide enough material at the top edge to extend about 2" underneath the plastic molding and piece #13b.**

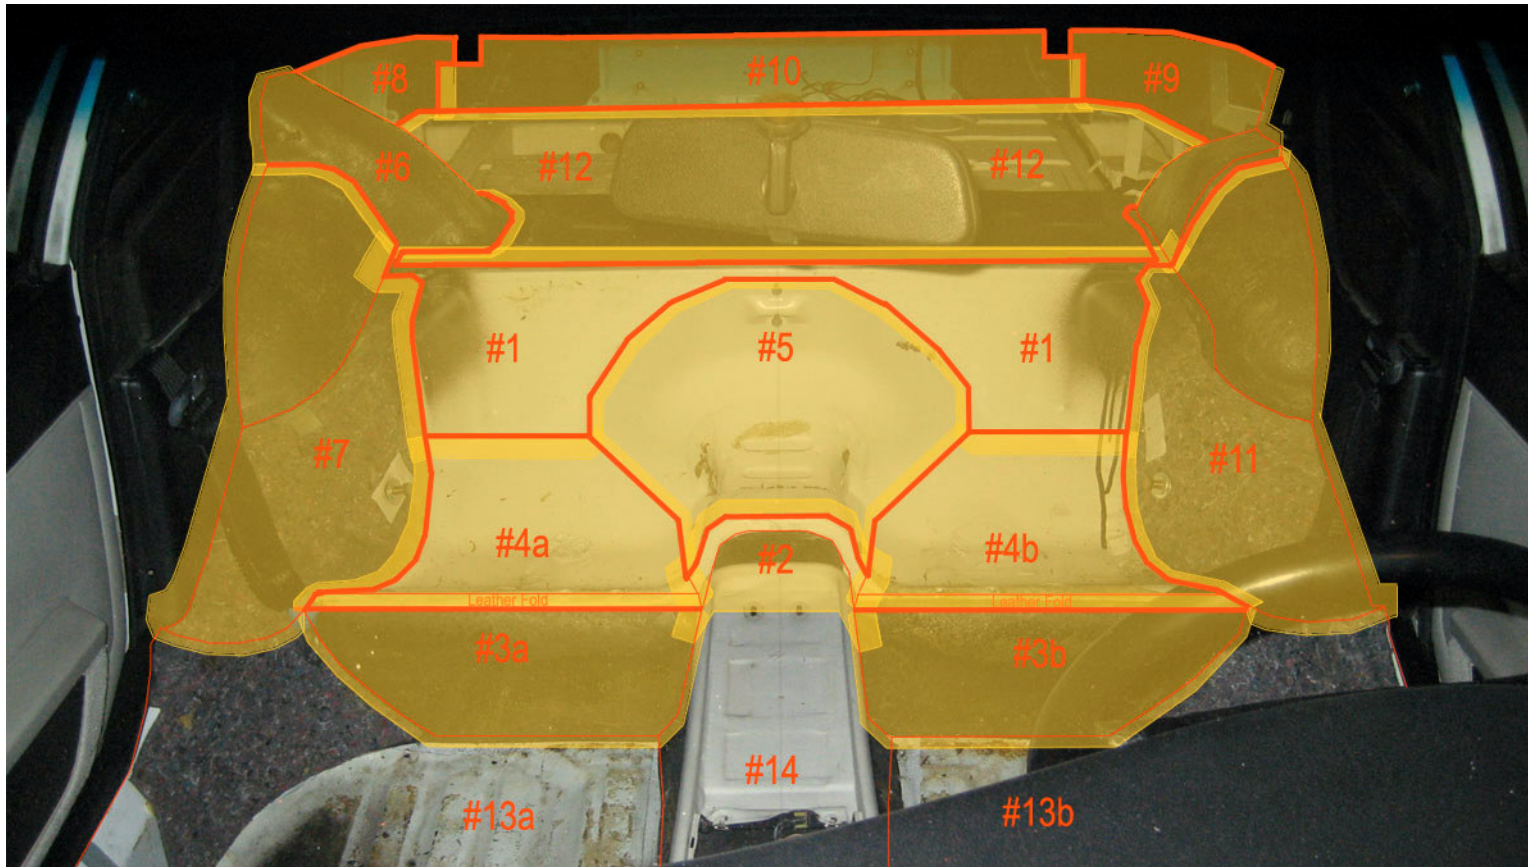


Piece #12 - (Standard 944 Kit)

- 1-piece, rear hatch mat.
- Provide a continuous finish seam along all edges.

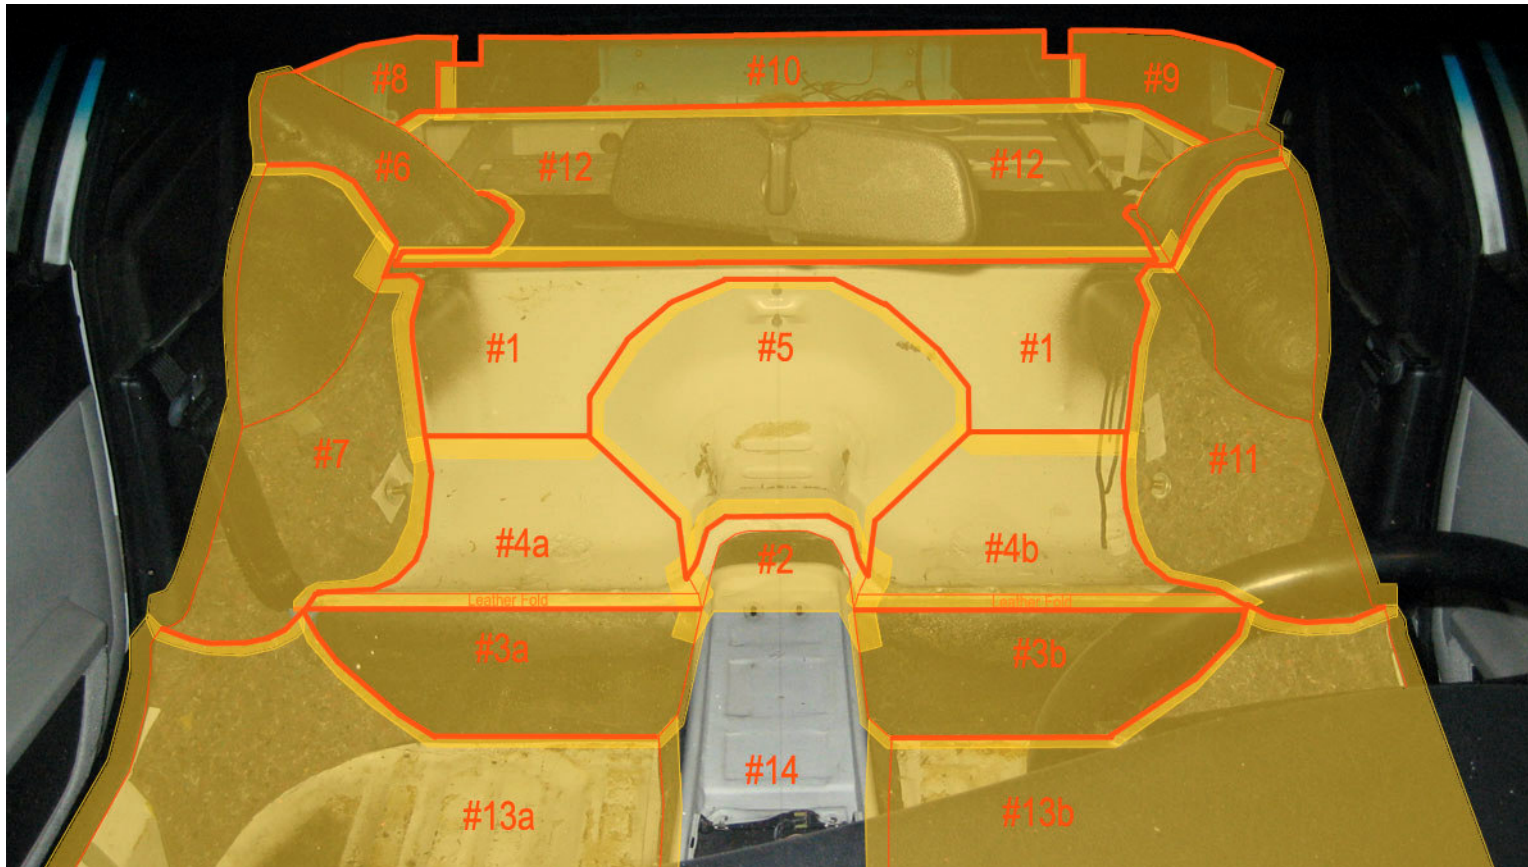

Piece #13a & 13b - (Standard 944 Kit)

- **2-pieces, rear half of floor boards.**
- **Provide a continuous finish seam that begins at the rear inside edge, adjacent to the tunnel and extends towards the side terminating at the plastic molding at the door sills.**
- **Extend width of piece an additional 2" at the inside edge to tuck underneath piece #14.**
- **Extend width of piece an additional 2" at the outside edge to tuck underneath plastic door sill molding.**

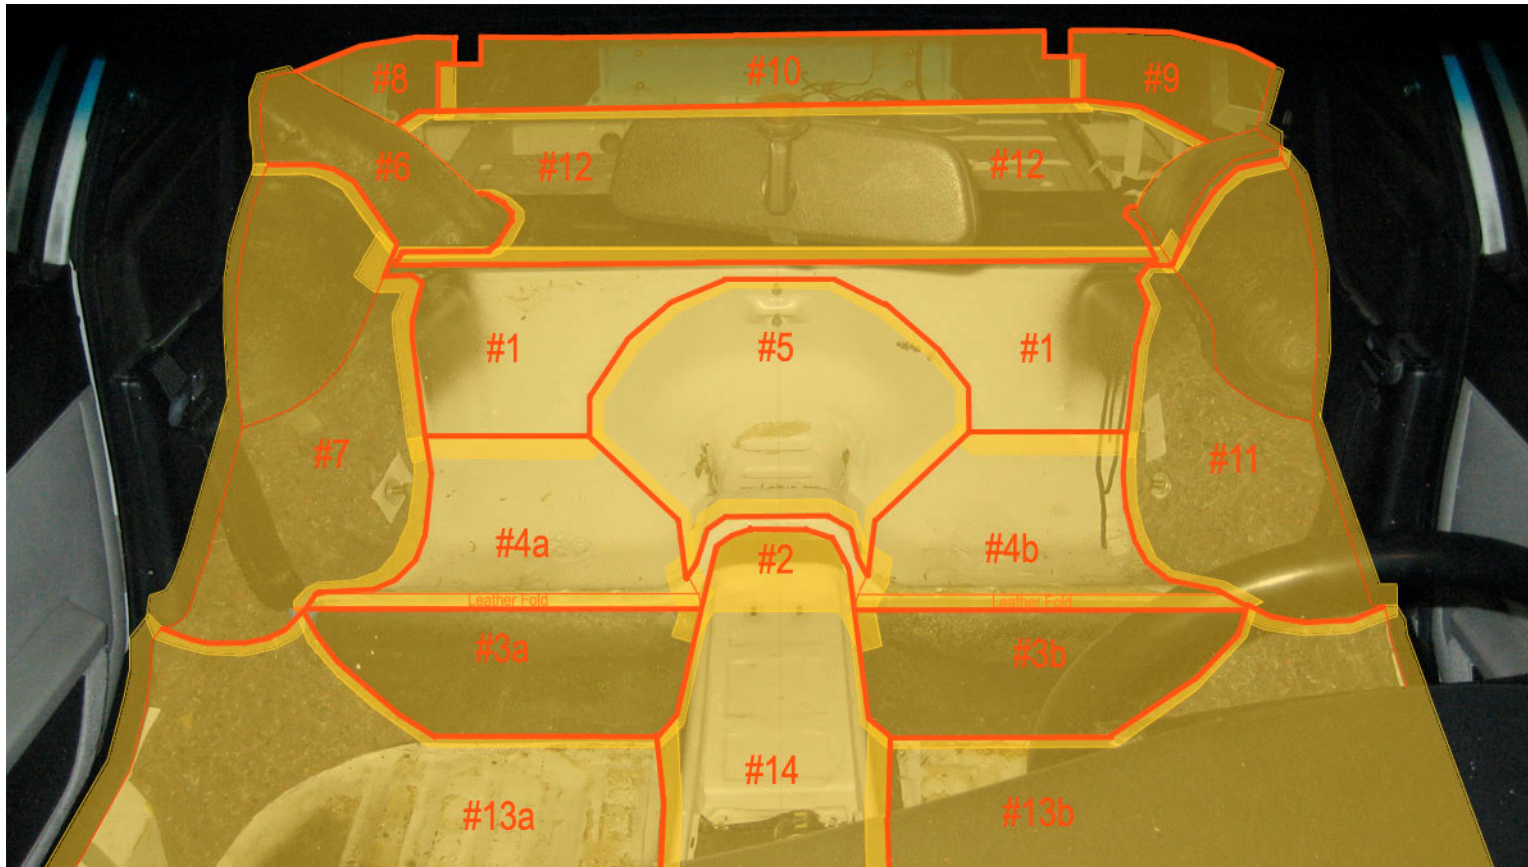

Piece #14 - (Standard 944 Kit)

- 1-piece, center tunnel piece.
- Provide a continuous finish seam at all edges.























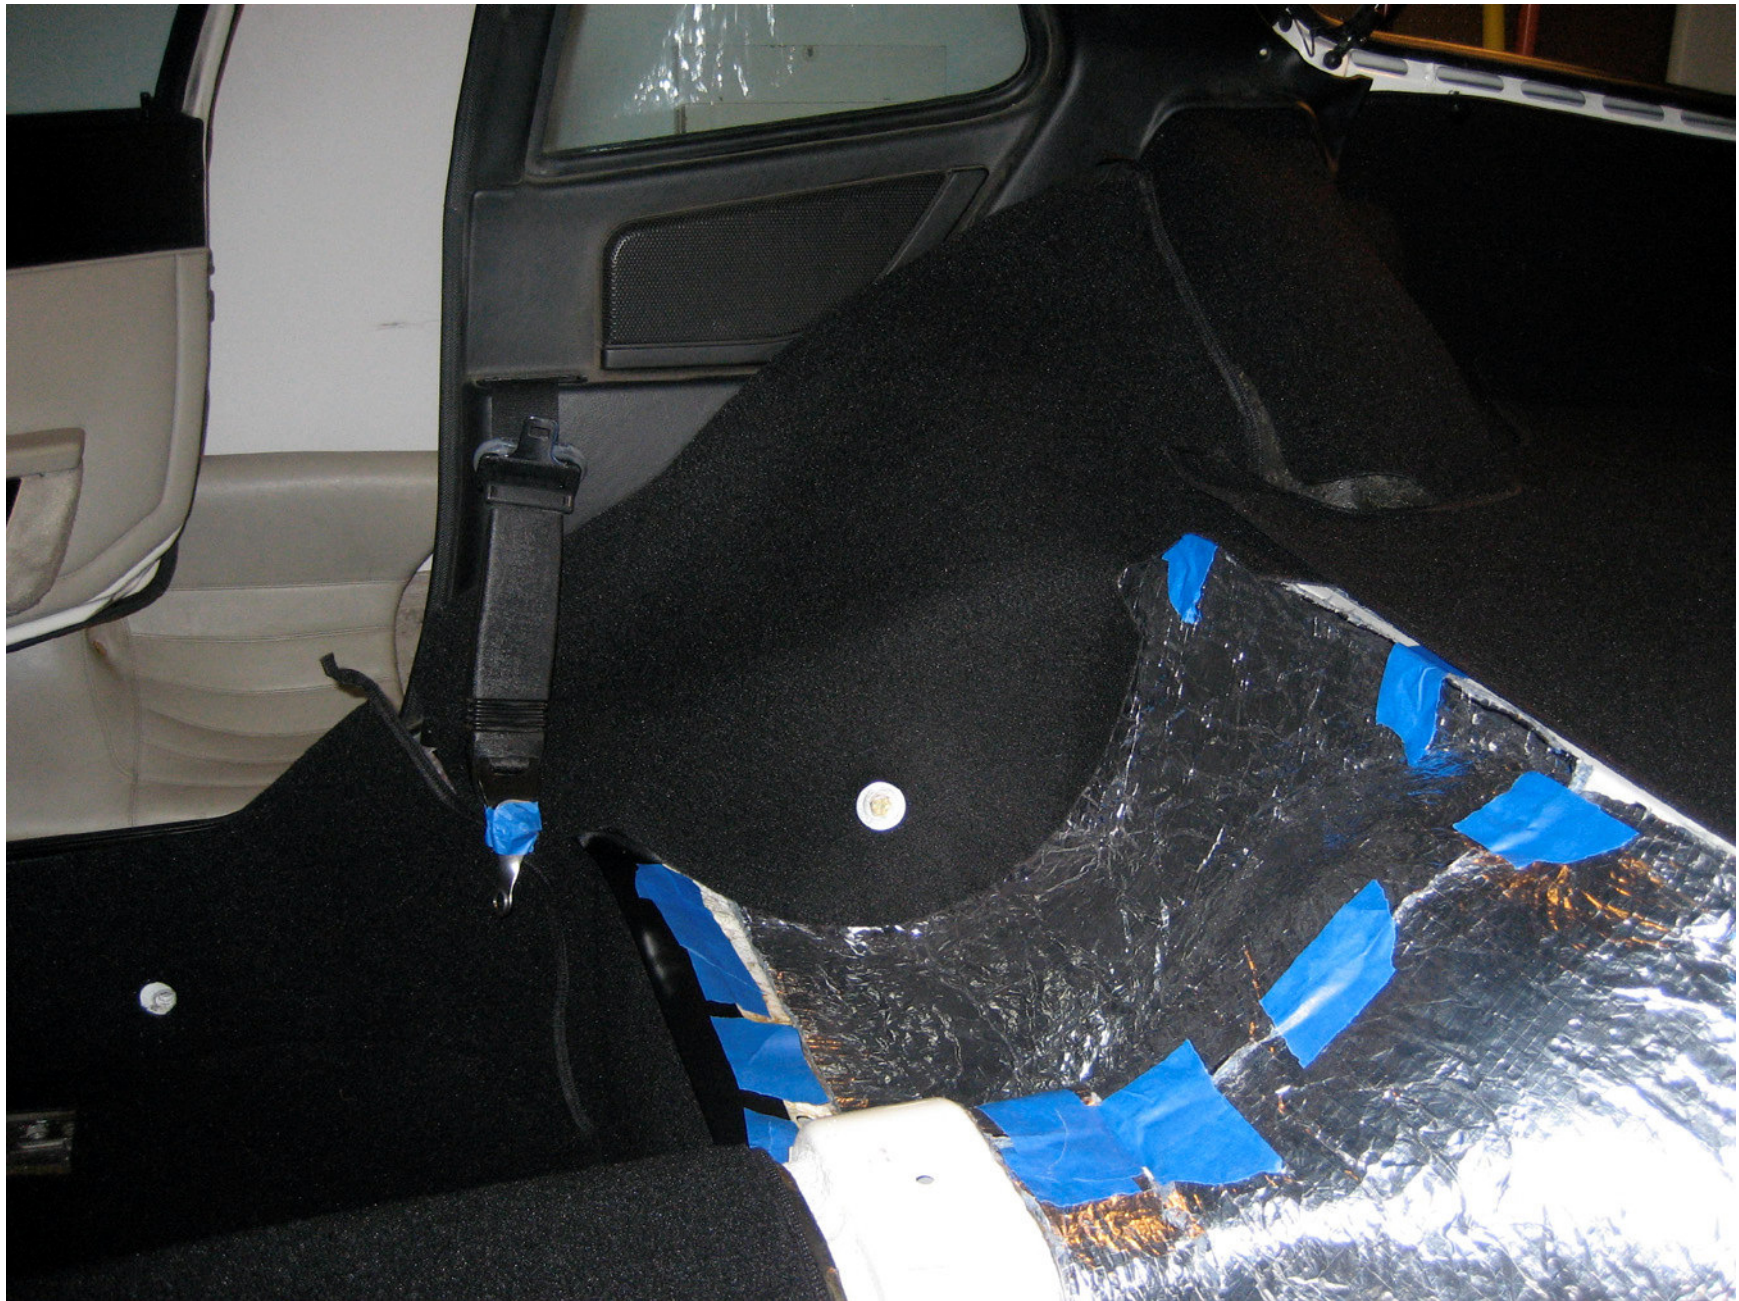

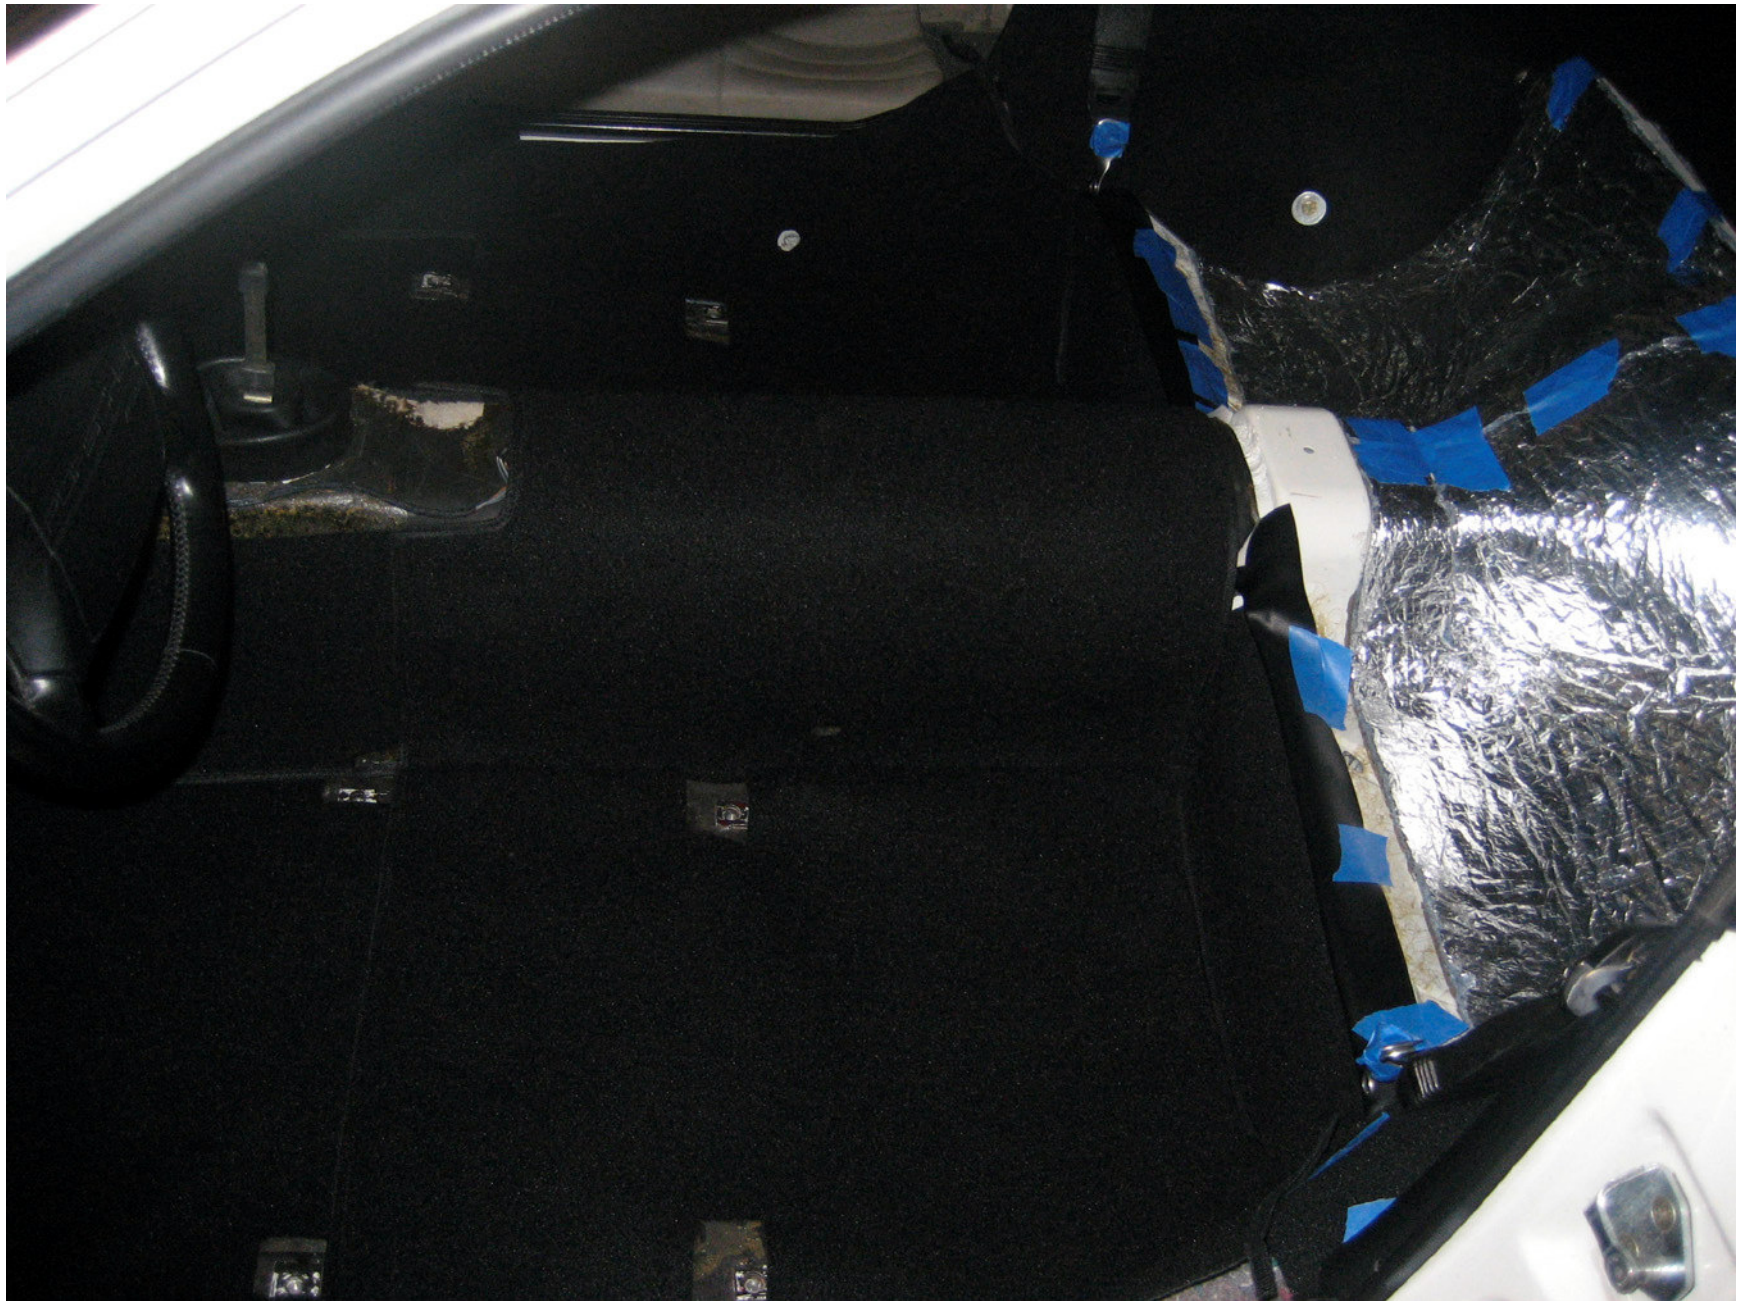

















RS Carpet Kit

with Rear Seat Delete

by

mj951